




Vaizdo stebėjimo sistemos

12. Kas galėtų būti, prisidėjau įrašymo įrenginį prie VMSlite programinės įrangos per Serijos numerį, tačiau man rodoma tik viena kamera

Ši problema pasireiškia kai įrašymo įrenginys pridedamas prie VMSlite programinės įrangos kaip kamera arba nustatomas netinkamas kanalų skaičius.

12.1. Įjunkite VMSlite programą, prisijunkite ir pasirinkite „Device“ kategoriją

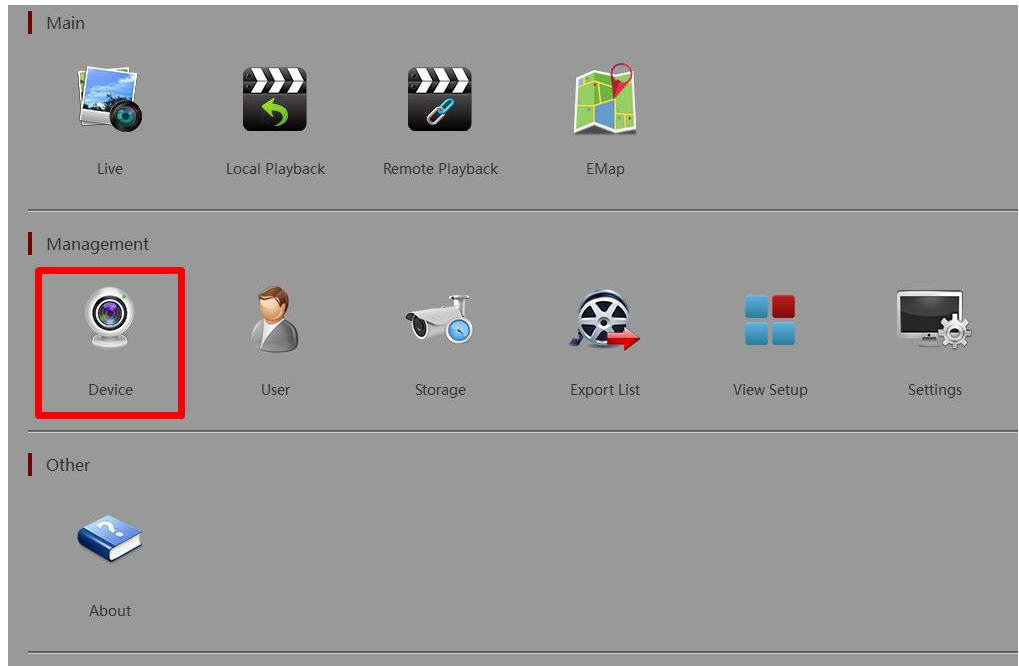

12.2. Toliau įrenginių sąrašė pasirinkite įrašymo įrenginį (jį identifikuoti galite pagal serijos numerį, kuris nurodytas pirmajame stulpelyje) ir jį ištrinkite

The screenshot shows a web interface with two main sections: "Added Devices" and "Online Devices".

Added Devices (Devices:2, Selected:1, Total Channels:10)

Device Name	Protocol	IP Addr	Port
988 [redacted]	Herospeed,P2P IPC	www.freeip.com	0
977 [redacted]	Herospeed,P2P NVR/XVR	www.freeip.com	0

Buttons: Add, Edit, Delete (with a red '2' next to it)

Question

Are you sure you want to delete?

Buttons: Yes (with a red '3' next to it), No

Online Devices (Devices:6, Selected:0, Total Channels:21)

Device Name	Protocol	IP Addr	Port	Is Added	Mac
XVR	Herospeed,XVR	192.168.1.82	80	No	00:00:1B:0F:4A:C9
IPC	Herospeed,IPC	192.168.1.93	80	No	00:00:1B:1E:0D:30
IPC	Herospeed,IPC	192.168.1.91	80	No	00:00:1B:1D:FC:30
IPC	Herospeed,IPC	192.168.1.92	80	No	00:00:1B:1B:A1:E8
IPC	Herospeed,IPC	192.168.1.90	80	No	00:00:1B:1E:15:97
IPC	Herospeed,IPC	192.168.1.94	80	No	00:00:1B:20:76:68

12.3. Iš naujo pridėkite įrenginį paspausdami mygtuką „Add“

The screenshot shows a web interface with a single section: "Added Devices".

Added Devices (Devices:1, Selected:0, Total Channels:1)

Device Name	Protocol	IP Addr
988 [redacted]	Herospeed,P2P IPC	www.freeip.com

Buttons: Add (highlighted with a red box), Edit, Delete

- 12.4. Užpildykite formą (nepamirškite „Protocol“ pasirinkti „XVR/NVR“ ir nurodyti įrenginio palaikomų kanalų skaičių) ir paspauskite „Next step“

Type IP addresses

Type the IP addresses of the hardware you want to add to your system. You can speed up the scanning process by selecting the appropriate protocol of the devices. We will use your inputted user and password primarily to connect, but if you don't input them, we will try to use default. [See default user and password.](#)

Add Hardware Devices

IP	Port	User	Password	Channel Num	Protocol	Status
	80			1	Auto	

Add P2P Devices

Series Num	User	Password	Channel Num	Protocol	Status
1977	admin	3.....59	4	P2P NVR/XVR	
			1	P2P IPC	

6. Next step Cancel

- 12.5. Kai įrenginio statusas bus nurodytas kaip „Connect ok“, paspauskite „Add“

Channel Num	Protocol	Status
9	P2P NVR/XVR	Connect ok
1	P2P IPC	

Add Cancel

Dabar sąraše jau bus visos prie įrenginio prijungtos kameros