


Valena Life™ 2 P+E socket outlets - IP 44

Cat. No(s): 7 531 19 - 7 531 79

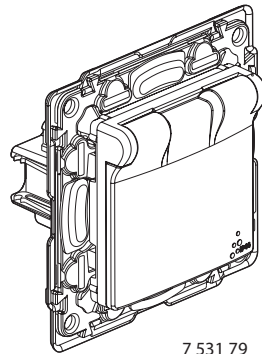

7 531 79

1. USE


Waterproof socket outlets, Franco-Belgian et German standards.
 Mechanisms supplied with:
 - Support
 - Cover plate
 - Airlight sleeve
 - Site protective cover
 To be fitted with single module or multi-module plates.
 Mounted on standard plates.

2. RANGE

Description	White
2 P+E socket with shutters and flap cover Franco-Belgian standard	7 531 79
2 P+E socket with shutters and flap cover German standard	7 531 19

3. OVERALL DIMANSIONS (mm)

Cat. No. 7 531 19

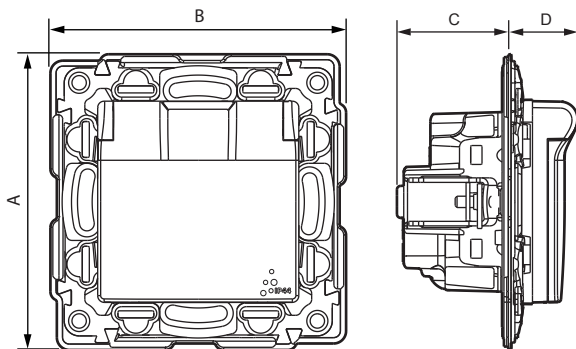

References	A	B	C	D
7 531 79	78.5	78.5	28	17.5
7 531 19	78.5	78.5	29.5	18.5

4. CONNECTION

Automatic terminals
 Capacity: 2 x 2.5 mm²
 Stripping length: 13 mm
 Compatible flexible or rigid cables.

5. TECHNICAL CHARACTERISTICS

- **5.1 Mechanical characteristics**
 Protection against solid bodies and liquids: IP 44
 Protection against impact: IK 04
- **5.2 Material characteristics**
 Polygloss appearance
 Colour: White RAL 9003
 Material: - Membrane: PP
 - Cover: PP
 - Cover plate (of the socket outlet): PC
 - Halogen free
 - UV resistant
 Material of the support: - Polycarbonate grey RAL 7037 + metal
 - Halogen free
- Self-extinguishing:
 + 850° C / 30 s for insulating parts holding live parts in place
 + 650° C / 30 s for other parts made of insulating materials.
- **5.3 Electrical characteristics**
 Voltage: 250 V~
 Current: 16 A
 Frequency: 50/60 Hz
- **5.4 Climatic characteristics**
 Storage and usage temperature: - 5° C to + 35° C

6. MAINTENANCE

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.
 Maintenance with the following products: Hexane (EN 60669-1),
 Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%,
 Window-cleaning products.

Caution: A preliminary test should be carried out if other specific
 cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
 Refer to e. catalogue.