


SWITCHING POWER SUPPLY

ITEM NO.: 15-AC24H-2A

OVERVIEW:

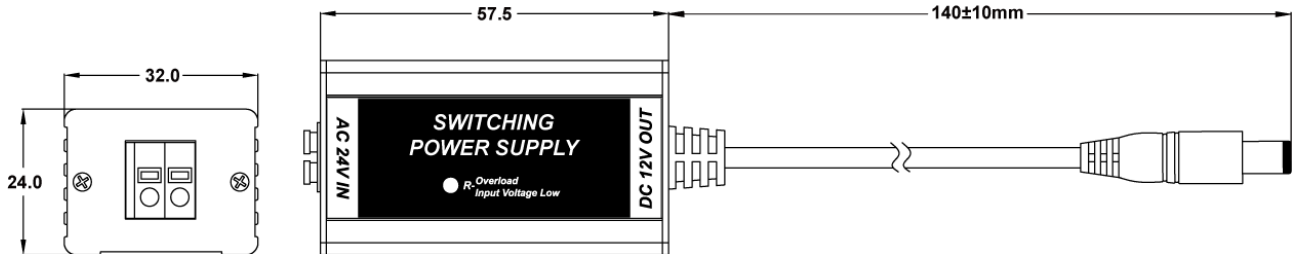

FEATURES:

- Convert AC/DC 24V to DC12V for camera or car TFT monitor
- Built-in surge protection at AC24 input line
- 12VDC/2000mA(MAX) output

INSTALLATION:

1. Connect power wires to input and output.
2. Green LED for working properly, Red LED for overload or input voltage low or use of abnormal.

PACKING:

1. Power converter ×1
2. User Manual ×1

CAUTION:

1. Avoid places under raining directly.
2. Avoid damage to the device; do not attempt to break the seal.
3. Avoid places where temperatures exceed 50 °C or more.
4. Avoid places where there is a frequent vibration or shocks.
5. Only for inputting power AC/DC 24V.
6. Avoid possible shorting of the output adapter. Make all connections to the power converter before the source AC/DC 24V power input is plugged.
7. Work environment should be well ventilated.

SPECIFICATION:

ITEMS	15-AC24H-2A
INPUT VOLTAGE	AC24V (AC17 to AC28V) DC24V (DC18 to DC32V)
INPUT CURRENT	AC24V / 2.0A @ 100% FULL LOAD
OUTPUT POWER	DC12V +/- 2% Regulated
OUTPUT CURRENT	2.0A (MAX)
DIMENSIONS mm	57.5WX32HX24D
Weight g	55g