

Manufactured in China for:
DELTA-OPTI Monika Matysiak,
60-713 Poznan, 10 Graniczna St., Poland
www.shopdelta.eu

Outdoor PoE Switch User Manual

EXPERT-POE/OTD-82GSFP

■ Overview


It is outdoor PoE switch. It is integrated of PoE switch, optical fiber tray, air breaker, lightning arrester etc. It has IP55 protection grade, can be for outdoor using. It can be applied for surveillance monitoring, forest monitoring, etc.

■ Features & Specification


- ◇ AC220V mains power input, 120W DC52V power module inside.
- ◇ With 8x10/100M PoE downlink ports and 2x1000M SFP uplink ports.
- ◇ The maximum PoE power of single port is 30W, and the maximum PoE power of the whole machine is 115W.
- ◇ Provides three modes of VLAN to adapt to various complex environments.
- ◇ Supports PoE Auto-check function, which is specially designed to solve the problems of equipment frozen. It can automatically detect the frozen PD equipment and restart the ports' output of PSE, and restart the PD device. It greatly reduces the maintenance difficulty of engineering.
- ◇ 6KV surge protection, 6KV contact / 8KV air ESD protection.
- ◇ The box adopts waterproof (protection level IP55), anti-rust treatment, suitable for long time outdoor use.

Parameter	Specifications
Power supply	AC100-240V, 50/60Hz
Consumption	Self consumption<5W, PoE output max. 115W
Downlink ports	Ports 1~8 10/100Base-TX 30W PoE RJ45(IEEE 802.3af/at)
Uplink ports	Ports 9~10 1000Base-X SFP
PoE ports	Ports 1~8 support IEEE802.3af/at, end-span, 30W per port Max.
PoE Auto-check	If detect the frozen PD device, restart it
Working mode	Extend: 1~8 ports Max. 250m transmission, 1~8 ports are isolated, only can communicate with the uplink ports; restrain the network storm; close flow control. Default: common switch. VLAN: 1~8 ports are isolated, only can communicate with the uplink ports; restrain the network storm; close flow control.
1~8 PoE ports	Support IEEE 802.3af/at, end-span, single port≤30W
Cable and distance	Use cat5e/6,100m max.
Standard	IEEE802.3, IEEE802.3u, IEEE802.3z
Switch fabric	5.6Gbps
Through put	4.2Mpps
Buffer	12KB
MAC address table	4K
Indicator	Power: 1 *red ; Downlink 1~8: On RJ45 green LEDs indicate Link/Act, yellow LEDs indicate PoE Uplink9, 10: On RJ45 green LEDs indicate Link/Act
Protection	Surge: 6KV, standard: IEC61000-4-5 ESD: 6KV: contact 8KV: air, standard:IEC61000-4-2
SPD	AC lightning arrester, 385v AC@20KA , 2p, - 40 ~ 70 °C, lower incoming line, dxh06-fcs / 2r40
Working temperature	-20°C~65°C
Storage temperature	-40°C~85°C
Humidity	0~95%(No condensation)
Dimension(L×W×H)	280mm×200mm×260mm
Material / Color	Metal / White
Net-weight	8KG

■ Panel diagram

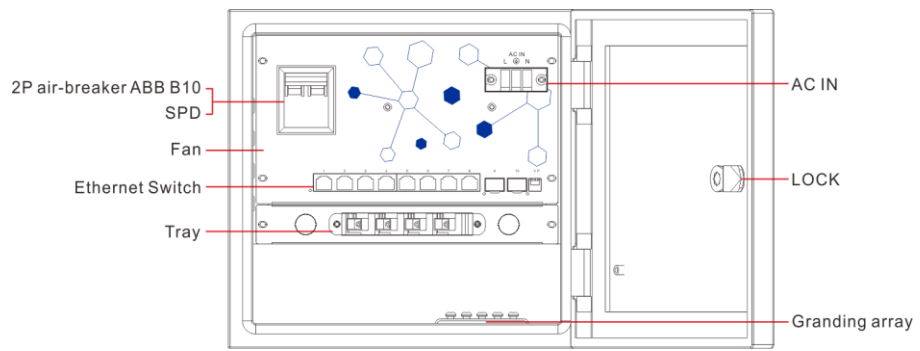

PoE switch

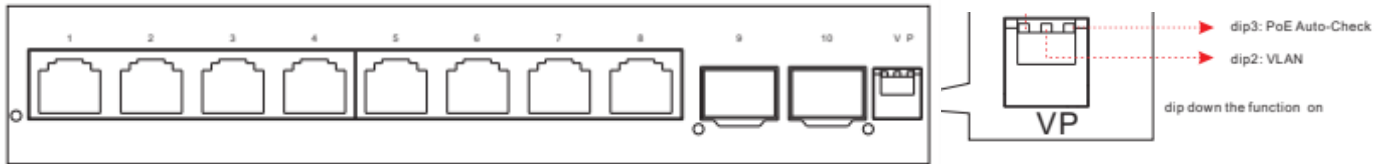

Attention1: V:VLAN: 1~8 ports are isolated, only can communicate with the uplink ports; restrain the network storm; close flow control.


P:PoE Auto-Check: PoE Auto-Check function is open/ closed by dip switch.

The switch always auto detect 1~8 ports whether frozen, if some ports are frozen, the switch will restart them, but other ports are unaffected

Attention 2: Opening method: Press the dip switch, the channel function started; you can turn on one or more functions.

■ Installation guide

1. Please remove 8 screws from the back of the box
2. Then please adjust the direction of the bracket and fix 8 screws
3. Default installation is wall hanging installation (Please contact us if you need pole hanging)

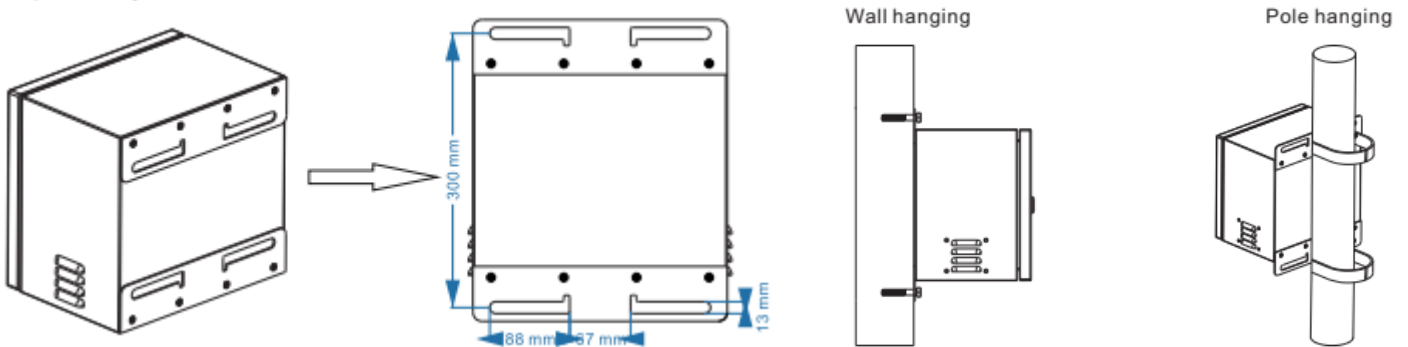

Attention: make sure the screws are fully tightened!

■ Package Contains:

- ✓ Surveillance metal box x 1pc
- ✓ Manual x 1 set
- ✓ Hanger for wall installation