


Kaip įjungti judesio detekcijos pranešimus į el. paštą kameroje? GMAIL

1. Prisijunkite prie kameros per Internet Explorer naudojant jos IP adresą.

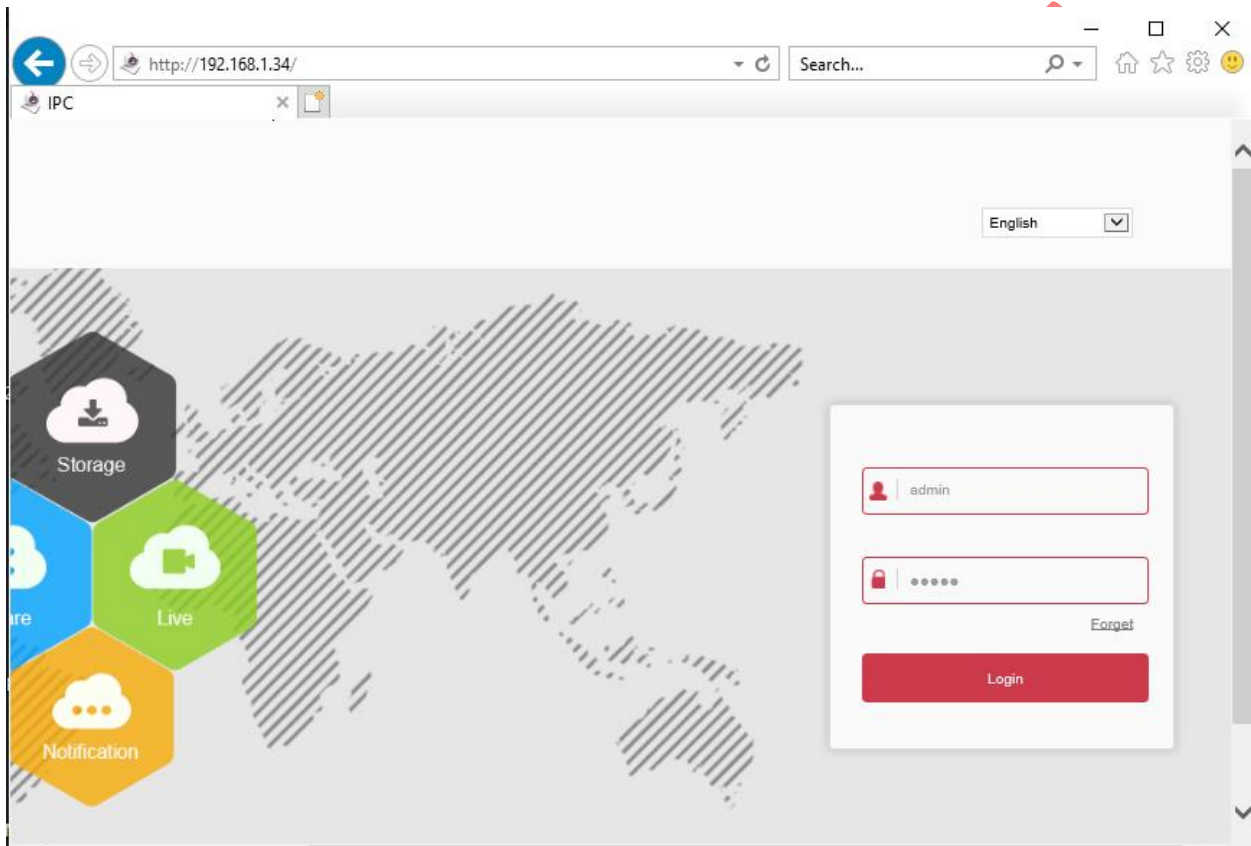


2. Spaskite „Login“.

3. Spauskite „Configuration“.



4. Spauskite Network > Advance Setup > SMTP.

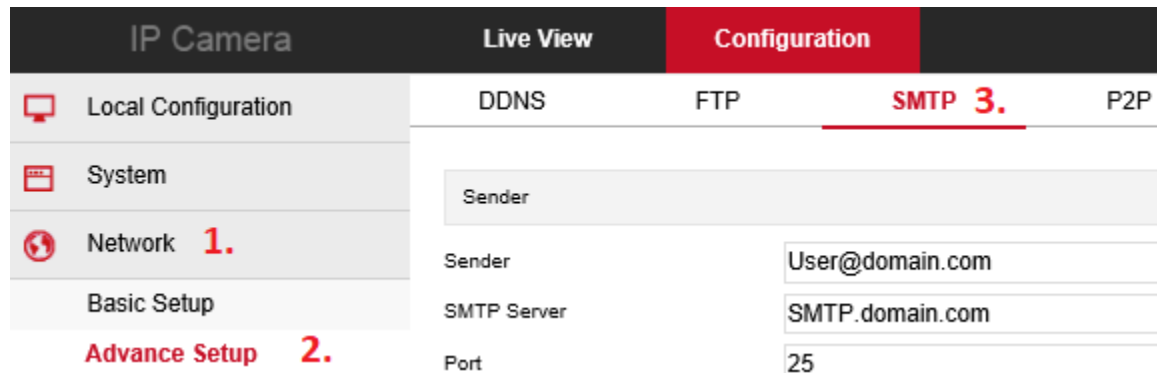

The screenshot shows the 'IP Camera' configuration interface. The 'Configuration' tab is selected. In the left sidebar, 'Network' is marked with a red '1.' and 'Advance Setup' is marked with a red '2.'. The 'SMTP' sub-tab is highlighted with a red '3.'. The main content area shows the SMTP configuration fields: 'Sender' (User@domain.com), 'SMTP Server' (SMTP.domain.com), and 'Port' (25). A large red checkmark is overlaid on the right side of the interface.

5. Atlikite viską taip, kaip parodytą sekančiame paveikslėlyje.



This screenshot provides a detailed view of the SMTP configuration page. Red annotations with numbers 1 through 8 guide the user through the steps:

- 1.** Jūsų el. paštas (Your email address) - points to the 'Sender' field with value 'akropolis@pyramid.lt'.
- 2.** Įveskite tą patį kaip čia. (Enter the same as here.) - points to the 'SMTP Server' field with value 'SMTP.gmail.com'.
- 3.** Įveskite tą patį kaip čia (Enter the same as here.) - points to the 'Port' field with value '465'.
- 4.** Pakartokite savo el.paštą (Repeat your email address) - points to the 'User Name' field with value 'akropolis@pyramid.lt'.
- 5.** Jūsų el. pašto slaptažodis (Your email password) - points to the 'Password' field, which is masked with dots.
- 6.** Pakartokite el.pašto slaptažodį (Repeat email password) - points to the 'Confirm Password' field, which is also masked with dots.
- 7.** Įveskite el. paštą dar kartą. (Enter email address again.) - points to the 'Email1' field in the 'Receiver' section, which contains 'akropolis@pyramid.lt'.
- 8.** Spauskite Save (Click Save) - points to the 'Save' button at the bottom left.

Other visible fields include 'Upload Via SMTP' (MESSAGE), 'Alarm Duration' (10 s), and a checkbox for 'My Server Requires Authentication'.

6. Kairėje pusėje spauskite Events > uždėkite varnelę ant „Enable“ > Matomame kameros vaizde nusipieškite zoną, kurioje norėsite fiksuoti judesį arba paspauskite „Select All“ > Paspauskite „Save“ mygtuką.

The screenshot displays the 'IP Camera' configuration interface. The top navigation bar includes 'IP Camera', 'Live View', and 'Configuration'. The left sidebar lists various settings: Local Configuration, System, Network, Video, Image, and Events. The main content area is titled 'Motion Detection' and includes sub-tabs for 'Area Settings', 'Arming Schedule', and 'Linkage Method'. The 'Area Settings' tab is active, showing a live camera feed with a red grid overlay. A red arrow points to the 'Select All' button, which is used to select the entire area for motion detection. Below the grid, there is a 'Sensitivity' slider set to 5. At the bottom, a red 'Save' button is visible. Red annotations provide step-by-step instructions: '1. Spauskite Events' points to the Events menu item; '2. Uždėkite varnelę' points to the 'Enable' checkbox; '3. Spauskite Select All arba pelės pagalba nusipieškite zoną, kurioje norite fiksuoti judesį.' points to the 'Select All' button; and '4. Spauskite save.' points to the 'Save' button.

IP Camera

Live View

Configuration

Local Configuration

System

Network

Video

Image

Events

Events 1. Spauskite Events

Motion Detection

Privacy Mask

Video Tampering

Exception

ROI

☒ Enable 2. Uždėkite varnelę

Area Settings

Arming Schedule

Linkage Method

Select All

Clear All

Sensitivity

5

Save

3. Spauskite Select All arba pelės pagalba nusipieškite zoną, kurioje norite fiksuoti judesį.

4. Spauskite save.

7. Tame pačiame lange spauskite „Linkage method“, sudėkite visas varneles ir paspauskite „save“.

Motion Detection Privacy Mask Video Tampering Exception ROI

☒ Enable

Area Settings Arming Schedule **Linkage Method** 1. Spauskite Linkage Method

☒ General Linkage

☒ Upload Via SMTP 2. Sudėkite visas varneles

☒ Upload Via FTP

☒ Upload Via Cloud

Save 3. Spauskite Save

8. Užeikite į <https://myaccount.google.com/> ir prisijungtie prie savo paskyros naudodami savo GMAIL el. pašto adresą ir slaptažodį (tokį pat, kaip įvedėte į kameros nustatymus).

Google Account

Home

Personal info

Data & personalization

Security

People & sharing

Payments & subscriptions


Help

Send feedback


Spauskite Sign in

Sign in

9. Kai prisijungsite, kairėje pusėje spauskite „Security“ arba „Sauga“.

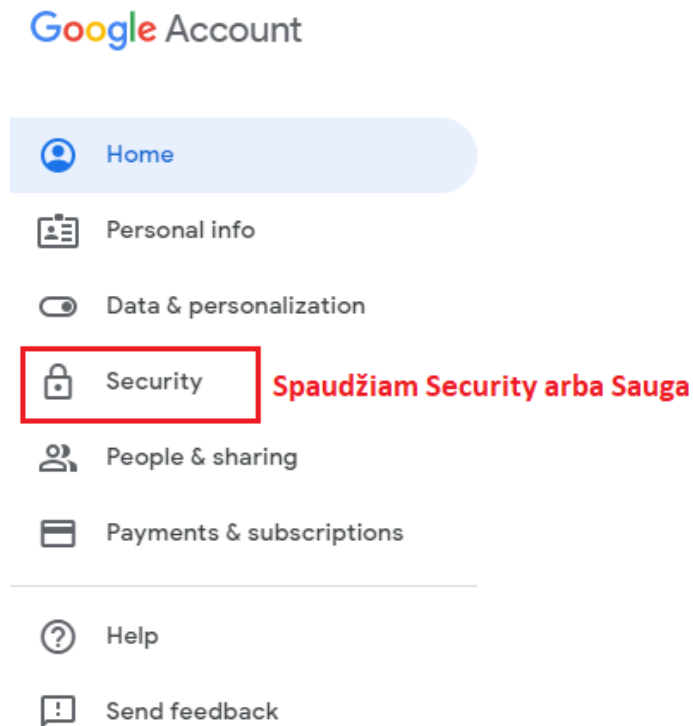

10. Leiskitės žemyn, kol pamatysite langą: „Nelabai saugių programų galimybė pasiekti paskyrą ir paspauskite „Ijungti prieigą“.

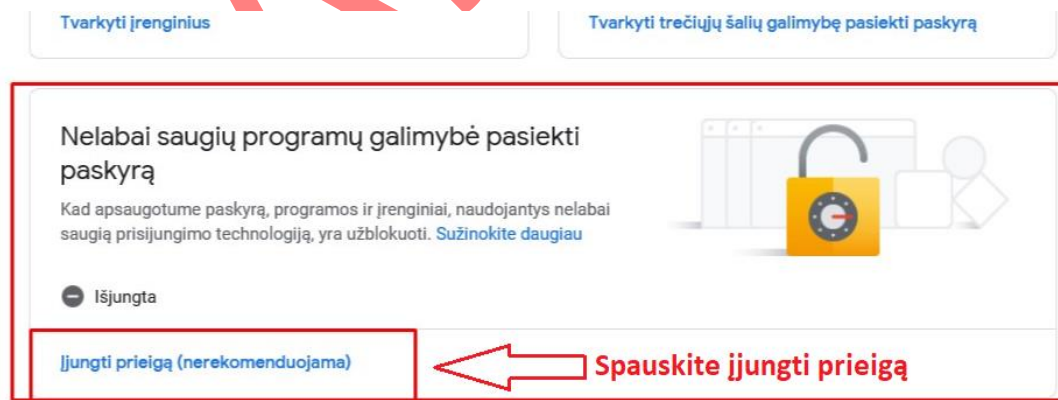

11. Atsiradus šiam langui įjunkite atsiradusį mygtuką.

← Nelabai saugių programų galimybė pasiekti pask...

Kai kurios programos ir įrenginiai naudoja nelabai saugią pažeidžiamą. Galite išjungti šių programų prieigą (rekomenduojame jas naudoti nepaisydami rizikos). „Google“ autor nenaudojamas. [Sužinokite daugiau](#)

Paspauskite ant mygtuko, kad jis įsijungtų

Leisti ne tokias saugias programas: ĮJUNGTI



Viskas. Judesio pranešimai į el. paštą įjungti.

PYRAMID.V